




hp folio13 lcd Replacement

Replacing laptop LCD for example : folio13

Written By: eastar

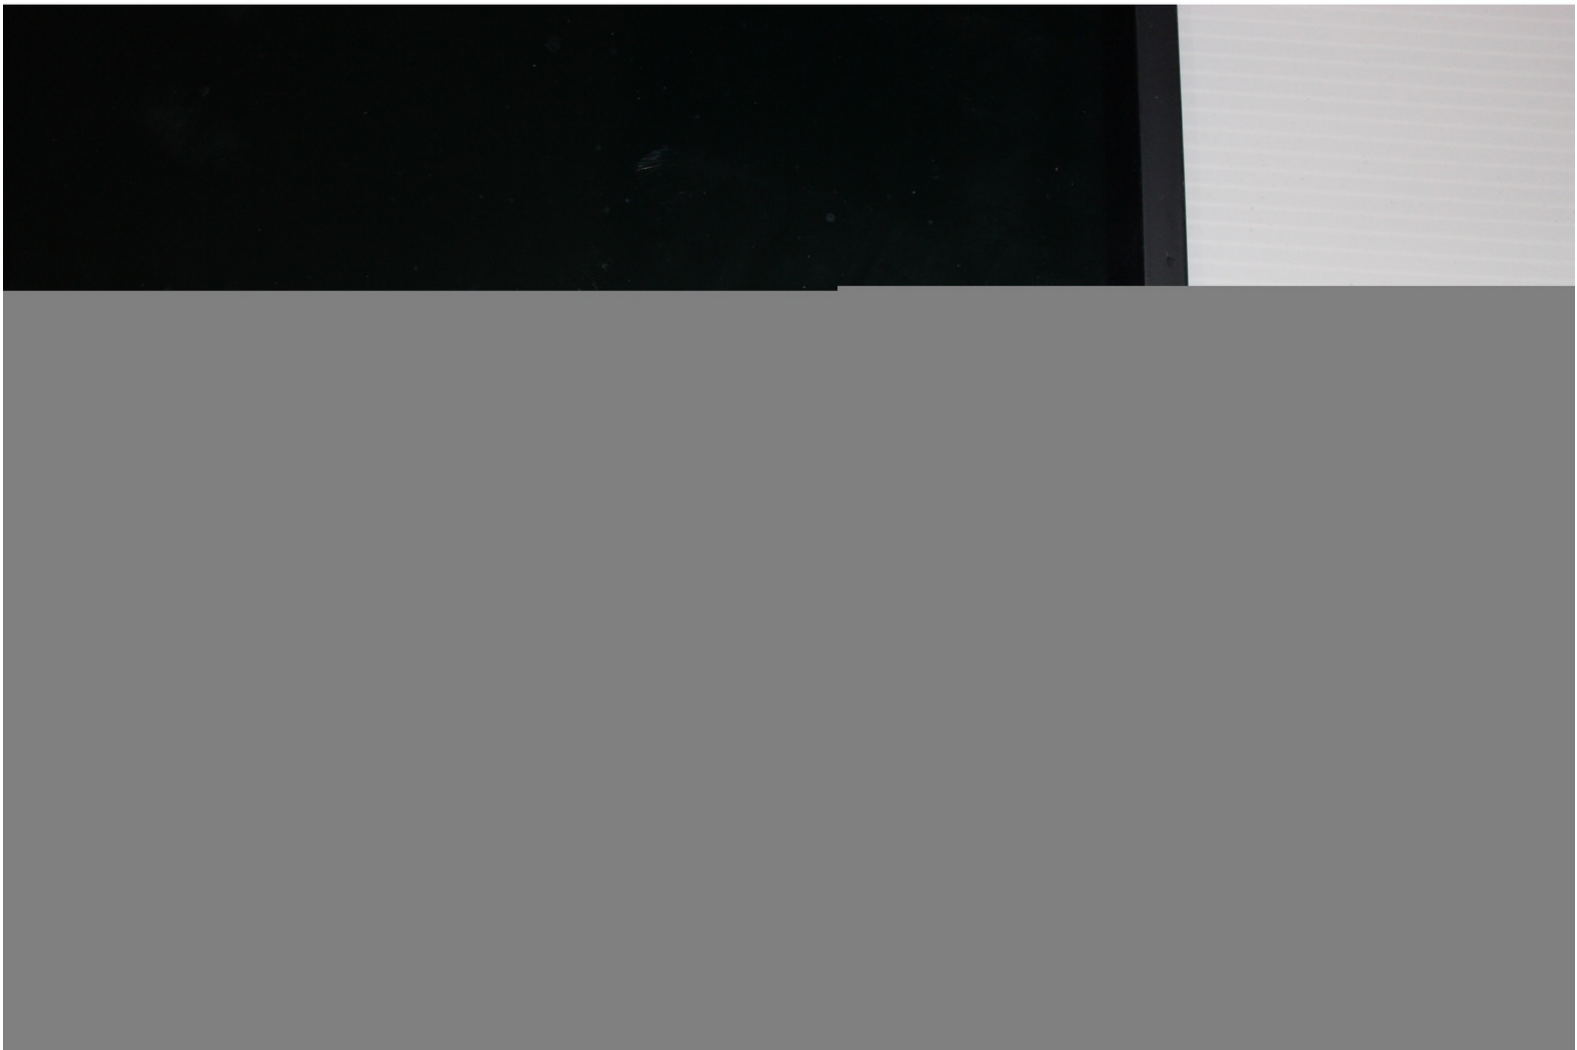

Step 1 — lcd




- In the following general have screws
Usually hidden in a small screw
below the cover sheet

Step 2



- In the notebook shell intermediate
insert a thin card This will separate
the shell

Step 3

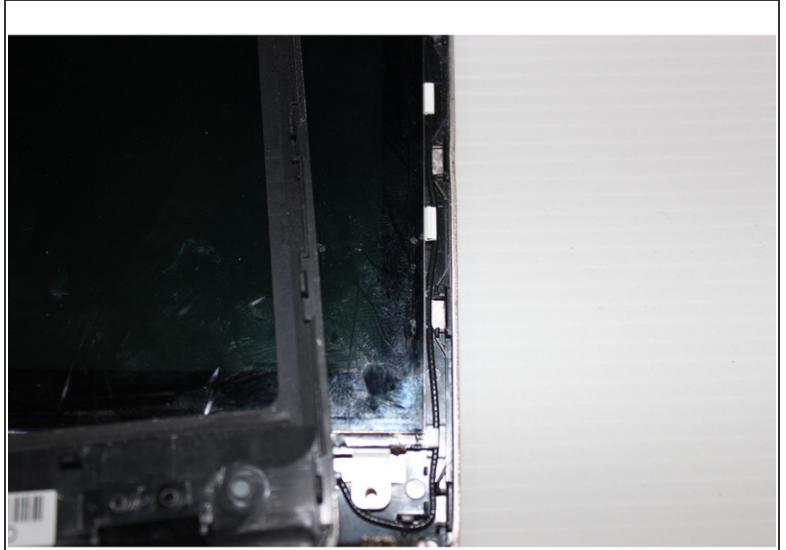

- To separate the shell casing removed some attention how to combine together The perfect time to go into the screen You will understand how to combine together

Step 4



- Many models of LCD directly could get down But this machine's LCD screen needs to move down flat push

Step 5



- The LCD screen upside down We can put the screen line to win Must pay attention to the screen wire interface

Step 6



- The new LCD and then put the housing installed Screws installed on the notebook intact You can continue to work

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 09:55:52 AM.